

INTEGRA® 605

Automatic canister filler

Individual adaptation made simple. The automatic canister filler INTEGRA® 605 is intended for filling canisters in below-surface or below-bunghole mode, oriented towards the individual requirements. Depending on the design the canisters can be supplied open, with screw caps or dust caps and closed after filling with screw plugs or screw caps.

BENEFITS

- Completely automatic opening, filling and monitored closing units
- Torque evaluation during closing
- High variation of different container sizes
- Central touch panel for all units
- Variety of essential accessories (for example: labeling, palletizing, etc.)
- Components in stainless steel and acid protection design available




TECHNICAL DATA


Filling modes	Below-surface	Below-bunghole		
Air consumption [NI/cycle]	80	70		

INTEGRA[®] 605

Automatic canister filler

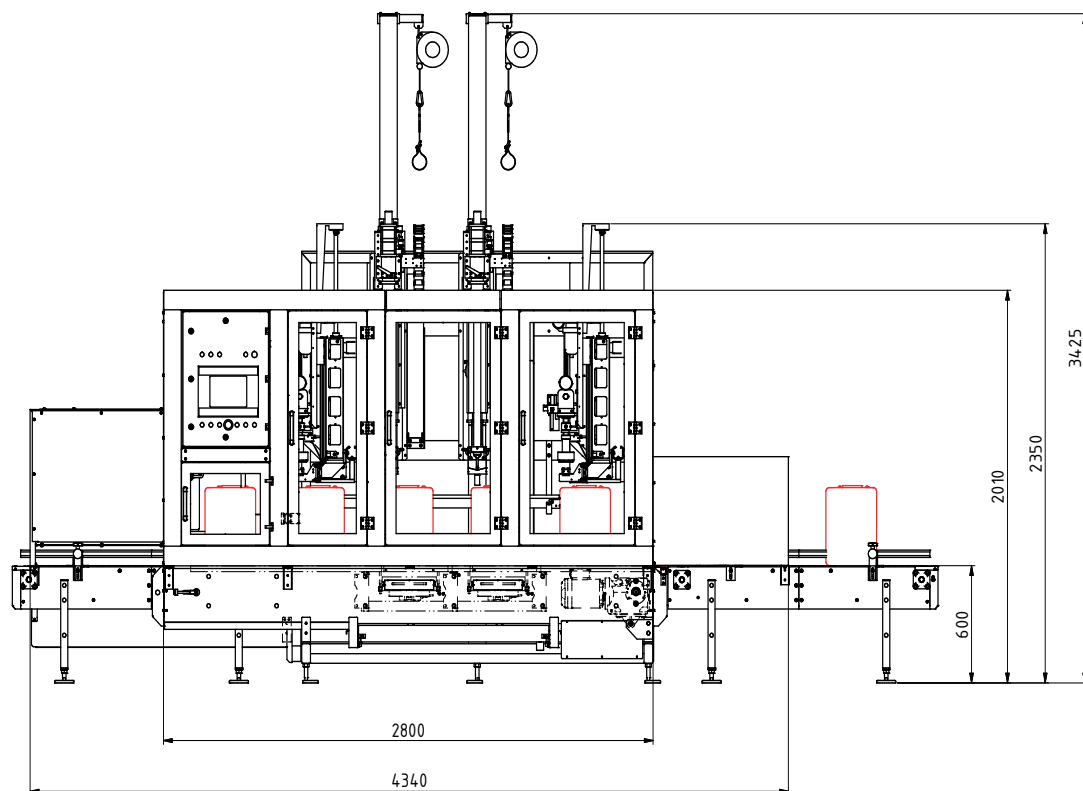

Configuration example

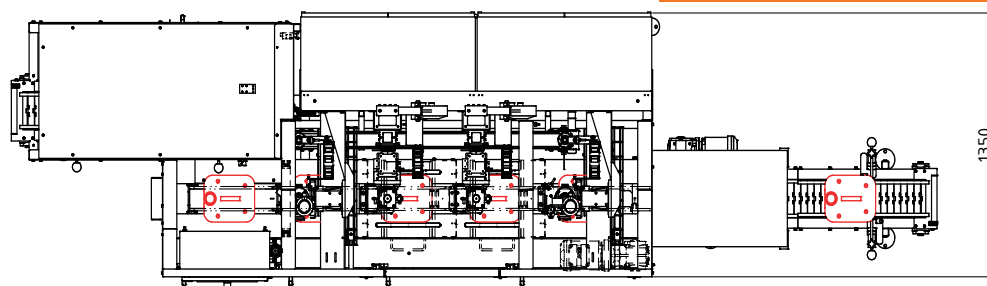

TECHNICAL DATA

ATEX design	On request
Electrical design	3x400V/N/PE, 50Hz, 5kVA
Weighing range	0.5 kg to 15 kg, increment 0.005 kg, 15 to 30 kg, increment 0.01 kg, 30 to 60 kg, increment 0.02 kg
External control	2 dry contacts or analogue signal for controlling an on-site product pump or a pilot valve
Can heights	100-400 mm
Required air pressure	5 bars dynamic
Weight	approx. 2,600 kg without accessories
Ambient temperature	5-35°C
Product temperature	0-130°C
Nominal output	up to 120-240 cans/hour